


# HYTROL CONVEYOR COMPANY, INC.

## Gravity **WHEEL** Model "FX 200" Heavy-Duty

### Flexible Gravity Skatwheel Conveyor

A proven performer for trailer loading and unloading. Ideally suited for packaging, shipping and flexible assembly lines. Order optional leg connect brackets to lock units together.

- Structural Steel Support: Channel steel spans the entire conveyor width for unequalled strength.
- 1-1/4" Side Plates: Aluminum alloy with ribbed construction for added durability. Assembled with shoulder bolts.

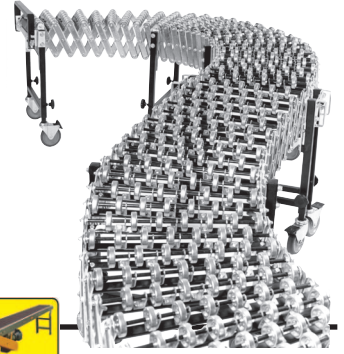

**GRAVITY**

Model Number	Width	Compacted to Expanded	Conveyor Height	Leg Sets Per Unit	Wheels Per Axle	Unit Weight
<b>FX200-18-12-ST-5</b>	18 in.	3 ft. to 12 ft.	28 1/2" to 41 1/2"	4	7	<b>215 lbs.</b>
<b>FX200-18-24-ST-5</b>	18 in.	6 ft. to 24 ft.	28 1/2" to 41 1/2"	7	7	<b>429 lbs.</b>
<b>FX200-24-12-ST-5</b>	24 in.	3 ft. to 12 ft.	28 1/2" to 41 1/2"	4	9	<b>252 lbs.</b>
<b>FX200-24-24-ST-5</b>	24 in.	6 ft. to 24 ft.	28 1/2" to 41 1/2"	7	9	<b>504 lbs.</b>

**24 HOUR SHIPMENT SUBJECT TO AVAILABLE STOCK  
24 HOUR SHIPMENT NOT GUARANTEED.**

## • Standard Specifications

**WIDTHS**-18 in. and 24 in.

**FRAME**-Flexible and extendible.

**LENGTHS**-12 ft. and 24 ft.

**EXPANSION RATIO**-4:1

**FLOOR SUPPORTS**-Adjustable type 28-1/2" to 41-1/2".

**WHEELS**-1.9 in. dia. with 1/4 in. bore.

**PACKAGE STOP**-Folds down when not in use.

**CASTERS**-Swivel casters with locking brake.

**CAPACITY**- 200 lbs. capacity per linear foot.

## • Optional Equipment

**LEG CONNECT BRACKETS**-Connecting two or more conveyors.

